



# Concealed Hinge BAC2010 Technical Data


## 304 Grade Stainless Steel & Industrial Nylon: Max 60kg

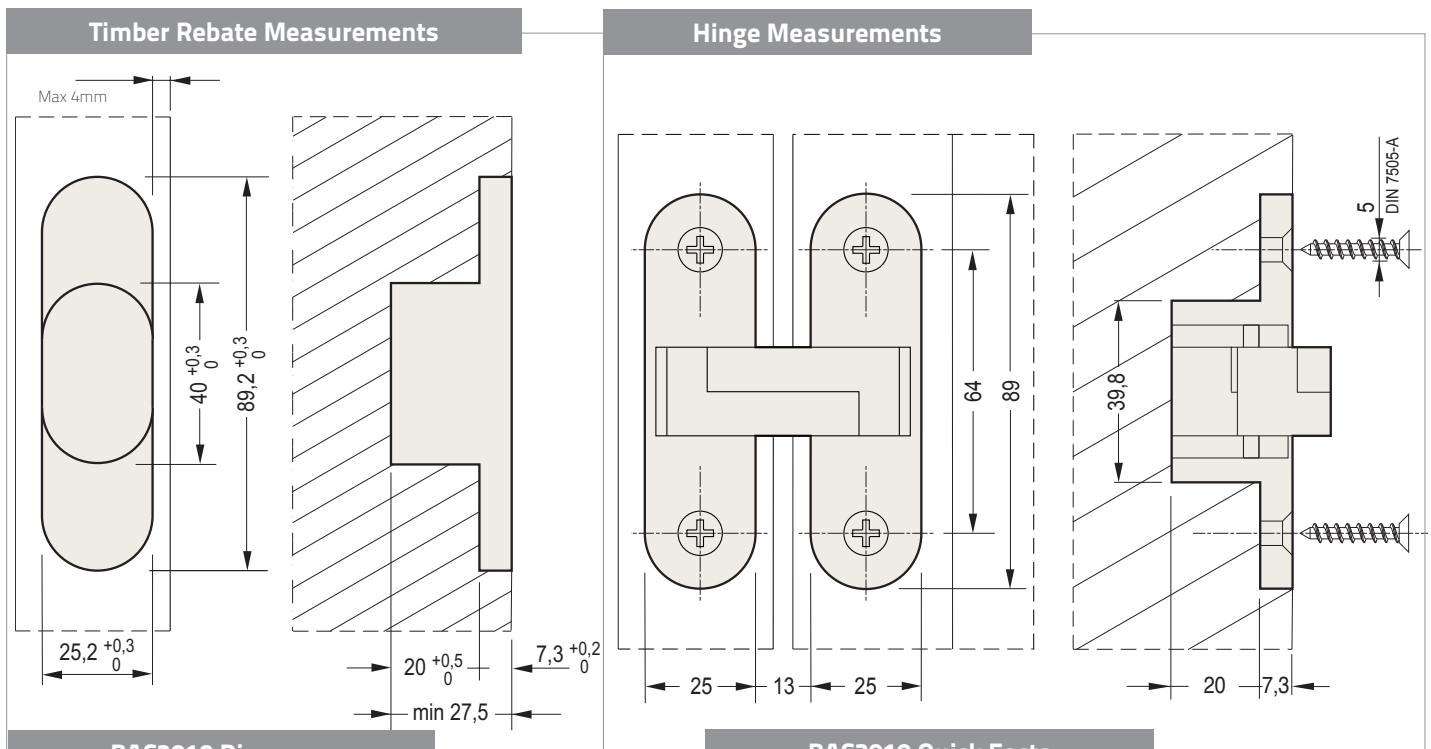


### BAC2010 Diagrams

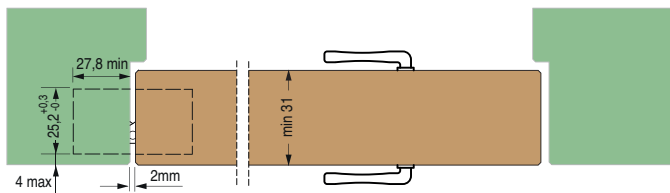

Hinge rebated 4mm max from edge of door and jamb on opening side

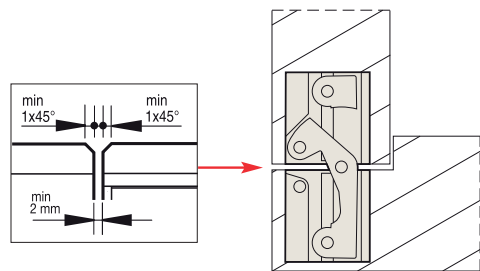

Min 2mm gap between door and jamb



Full 180° Opening

### BAC2010 Quick Facts

- 100% Made in Italy for over 50 years
- Suitable for high frequency opening doors
- Available in Satin Stainless or Polished Brass
- Jig & router template available for easy installation
- Made from industrial strength nylon & stainless steel
- Suitable for internal & external (under cover) locations
- Suitable for residential, commercial & industrial locations

Note: if being used with a door closer see page 36.

### No. of Hinges based on Door Width & Weight

Door width up to 850 mm height up to 2100 mm

- A** - 2 hinges 40 kg Max
- B** - 3 hinges 60 kg Max

Before applying a door closing device, please contact our technical office on +61 3 9571 5666

- more than 2100 mm high**
- C** - Please Call Bellevue

The hinge must be lubricated once a year

