

For a ceiling you'll be proud to look up to



At last an easy to install, ready to use insulated ceiling that will help you survive the extreme heat and humidity of the Australian summer; with the added bonus that it will also keep the chill away in winter and there is no need to replace your existing roof.


Pre-finished insulated Ceilink panels are specifically designed to fit under single skin roofing, new or existing, or line an existing wall. Ceilink panels are lightweight, quick and easy to install in just a few hours. Ceilink delivers great thermal comfort properties, reducing radiant heat transfer by over 90%.

- Modern, white pre-finished steel ceiling face
- R₇3.2* high insulation value provides excellent thermal performance * Assuming a 100mm cavity in summer
- Fire retardant EPS insulated core dramatically reduces radiant heat transfer, mould and condensation
- Unsupported span of up to 4m (max supported span 6m)
- Self mating interlocking joints

Perfect for home improvements. Ideal for retrofits and new projects.

From this to this • • Temp 32.3° Temp

Outside temperature 32





www.versiclad.com.au info@versiclad.com.au 02 9821 2199 www.ceilink.com.au info@ceilink.com.au 1300 000 900 Ceilink

install

• Lightweight - fast & easy to

• Wall support angles and

• LED downlights available.

accessories available



AFTER

BEFORE

Ceilink specifications

900 mm	Mass kg / m ²	3.85
52 mm	Unsupported / Supported span	4000 / 6000 mm
1800 / > 6000 mm		
Pearl White in Stucco or Smooth		
Summer $R_T 3.2$ Winter $R_T 1.9$ (assuming a 100mm cavity between Ceilink and roof)		
Interlocking tongue & groove		
Steel face, EPS core, Reflective foil back		
 Pearl White extruded aluminium angles for flat or gable roofs White smooth top self drilling tek screws 16mm (can be used in place of rivets) LED downlights - 13w LED with driver - IC insulation rating Dimmable - 3000k or 5000k - 100° beam angle 		
c and •Verandahs •Sheds •Pergolas •Awnings •Sun Rooms rcial Uses •Factory Units •Commercial Kitchens •Garages		
	52 mm 1800 / > 6000 mm Pearl White in Stucco of Summer R _T 3.2 Winter Interlocking tongue & of Steel face, EPS core, Ref • Pearl White extruded • White smooth top sel • LED downlights - 13 • Dimmable - 3000k • Verandahs • Sheds	52 mmUnsupported / Supported span1800 / > 6000 mmPearl White in Stucco or SmoothSummer R_T 3.2 Winter R_T 1.9 (assuming a 100mm cavity betweenInterlocking tongue & grooveSteel face, EPS core, Reflective foil back• Pearl White extruded aluminium angles for flat or gable• White smooth top self drilling tek screws 16mm (can be u)• LED downlights - 13w LED with driver - IC insulation• Dimmable - 3000k or 5000k - 100° beam angle• Verandahs • Sheds • Pergolas • Awnings • Sun Roo

Gable angles to

Standard






G&A Springett NSW : "...we were unable to use the outdoor area in summer even though it was covered as the heat that came of our steel roof made it just too uncomfortable to sit out there. Installing Ceilink just before Xmas and has been the best thing we have done in the 10 years of living in this house, we were told it would cut the heat down to which it certainly has but it has also given us the outdoor area we hoped for. I have recommended this product to several of our friends and would recommend it to anyone that is looking for a very cost effective way to cool down their outside areas... Thank you once again for a fantastic product"



Ceilink QUICK AND SIMPLE INSTALLATION

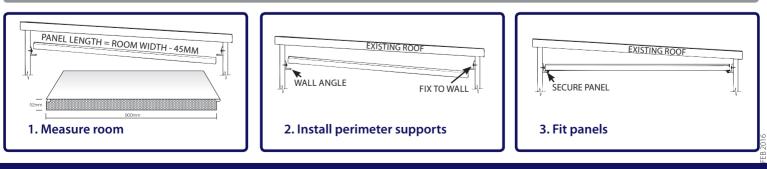



info@versiclad.com.au 02 9821 2199 www.ceilink.com.au info@ceilink.com.au 1300 000 900

