# TOUGHEN YOUR TERRAIN



# LANDSCAPING INFORMATION & INSTALLATION GUIDE



FOR A SOLID SURFACE ANYWHERE

# ABOUT DIAMOND GRID

## LANDSCAPING

Reduce infrastructure costs and eliminate on-going maintenance expenses.

Diamond Grid surface stabilisation systems are successfully used by leading landscaping companies throughout the world to cut costs on surfacing roads, shed floors and any other areas where a solid surface is required for all types of vehicles and pedestrians.

Diamond Grids also eliminate the need for on-going maintenance on unsurfaced areas that traditionally require machinery for repairs and maintenance on a regular basis.

1000

T/M2 FILLED
CRUSH RESISTANCE

300

T/M2 EMPTY
CRUSH RESISTANCE

100

PERCENT RECYCLED POLYPROPLENE









# CONCRETE REINFORCEMENT





# BASIC INSTALL GUIDE

#### **APPLICATIONS:**

**AIR STRIPS** 

**ARENAS** 

BIKE TRACK

**BOAT RAMPS** 

CAR PARKS

CATTLE YARDS

CONCRETE CAR PORT

CREEK CROSSINGS

DAIRY FARM LANEWAYS

DAY YARDS

**DRAINS** 

**DRIVEWAYS** 

FEED AND WATER TROUGHS

FIRE TRAILS

**GOLF CART TRACKS** 

HARDSTANDS

HAUL ROADS

HOT HOUSE FLOORS

**HELIPADS** 

MINE ACCESS ROADS

MINE CAMP PATHWAYS

MINE PLANT PATHS

MUDDY ROADS


PATHWAYS

PADDOCK SHELTERS

SHED FLOORS

STABLE FLOORS

WORKSHOP FLOORS



#### MINIMAL **BASE PREP**

- USING A GRADER OR A **BOBCAT AND SPREADER** BAR, LEVEL THE SITE IN READINESS TO LAY YOUR DIAMOND GRID
- LAY GEO FABRIC OVER THE LEVELLED AREA
- IF THE SITE IS STILL UNEVEN, 10MM OF CRUSHED 5MM MINUS ROCK AND FINES CAN BE SPREAD AS A BEDDING.
- LAY THE DIAMOND GRIDS STARTING IN ONE CORNER WITH THE MALE LUGS FACING OUTWARDS ON BOTH MALE SIDES.
- FILL THE DIAMOND GRID WITH A BOBCAT AND SPREADER BAR OR SOMETHING SIMILAR AND YOUR CHOICE OF MATERIAL\*.



#### **MEDIUM BASE PREP**

- LAY GEO FABRIC OVER THE AREA WHERE THE GRIDS ARE GOING TO BE LAID
- COVER THE GEO FABRIC WITH ROAD BASE AND COMPACT TO A LEVEL 40MM BELOW FINISH HEIGHT
- COMPACT ROAD BASE WITH ROLLER OR VIBRATING PLATE
- USING A GRADER OR A **BOBCAT AND SPREADER** BAR. LEVEL THE SITE IN READINESS TO LAY YOUR DIAMOND GRID
- IF THE SITE IS STILL UNEVEN, 10MM OF CRUSHED 5MM MINUS **ROCK AND FINES CAN BE** SPREAD AS A BEDDING.
- LAY THE DIAMOND GRIDS STARTING IN ONE CORNER WITH THE MALE LUGS FACING OUTWARDS ON BOTH MALE SIDES.
- FILL THE DIAMOND GRID WITH A BOBCAT AND SPREADER BAR OR SOMETHING SIMILAR AND YOUR CHOICE OF MATERIAL\*.

#### **EXCAVATION AND** MAJOR BASE PREP


- EXCAVATE SITE TO A DEPTH OF 200-350MM DEPENDING ON THE CONSISTENCY OF THE SUB GRADE
- LAY GEO FABRIC OVER THE AREA WHERE THE GRIDS ARE GOING TO BE LAID
- COVER THE GEO FABRIC WITH ROAD BASE AND COMPACT TO A LEVEL 40MM BELOW FINISH HEIGHT
- COMPACT ROAD BASE WITH ROLLER OR VIBRATING PLATE
- USING A GRADER OR A BOBCAT AND SPREADER BAR, LEVEL THE SITE IN READINESS TO LAY YOUR DIAMOND GRID
- IF THE SITE IS STILL UNEVEN, 10MM OF CRUSHED 5MM MINUS ROCK AND FINES CAN BE SPREAD AS A BEDDING.
- LAY THE DIAMOND GRIDS STARTING IN ONE CORNER WITH THE MALE LUGS FACING OUTWARDS ON BOTH MALE SIDES.
- FILL THE DIAMOND GRID WITH A BOBCAT AND SPREADER BAR OR SOMETHING SIMILAR AND YOUR CHOICE OF MATERIAL\*.

Active Trade Wholesale makes no representations or warranties in respect of the suitability of the Diamond Grid product to any customers individual applications. The information in this guide is general only and customers should seek advice prior to commencing installation to ensure that the conditions of their project are catered to.

Active Trade Wholesale accepts no liability where damage is caused to the Diamond Grid due to a failure to seek appropriate installation advice prior to commencing the project.

### DIAMOND GRID

900mm x 560mm x 40mm

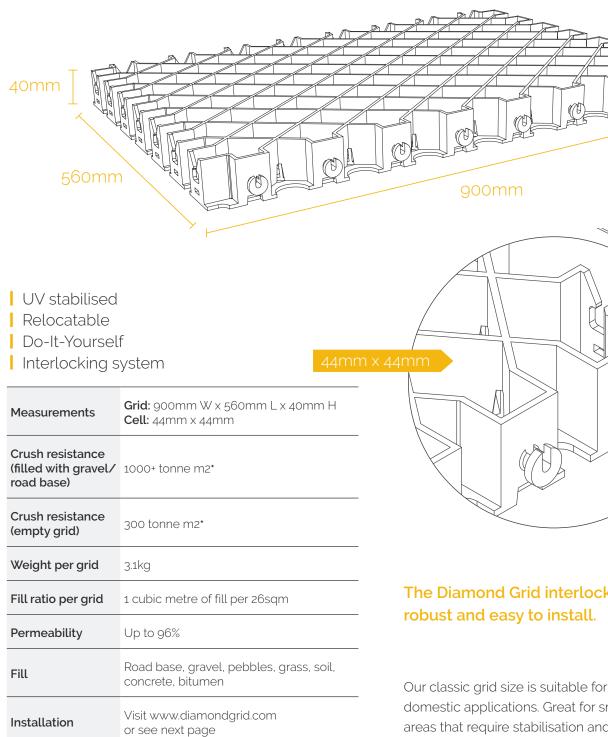






<sup>\*</sup> Tested by: The Faculty of Engineering and Surveying Centre of Excellence in Engineered Fibre Composites, University of Southern Queensland.

## The Diamond Grid interlocking system is

Our classic grid size is suitable for most rural and domestic applications. Great for smaller surface areas that require stabilisation and reinforcement. Highly recommended for feed & water troughs, stable floors, muddy areas, day yards. pathways, drains, driveways, golf cart tracks, boat ramps and anywhere needing toughening up on your property or workplace.

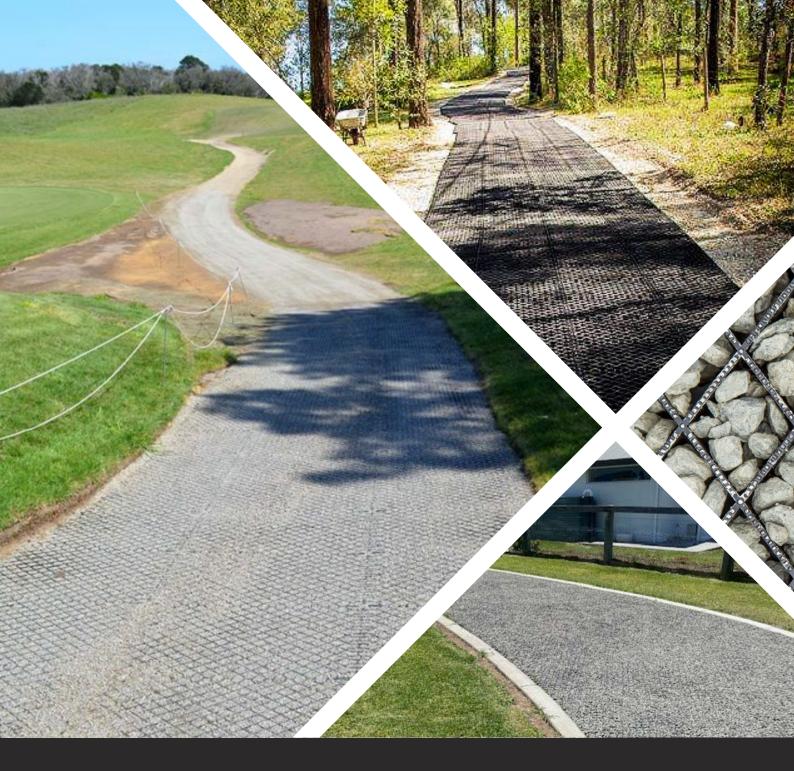

# FOR A SOLID SURFACE, ANYWHERE




**Significantly reduce** ongoing maintenance



100% Recycled polypropylene





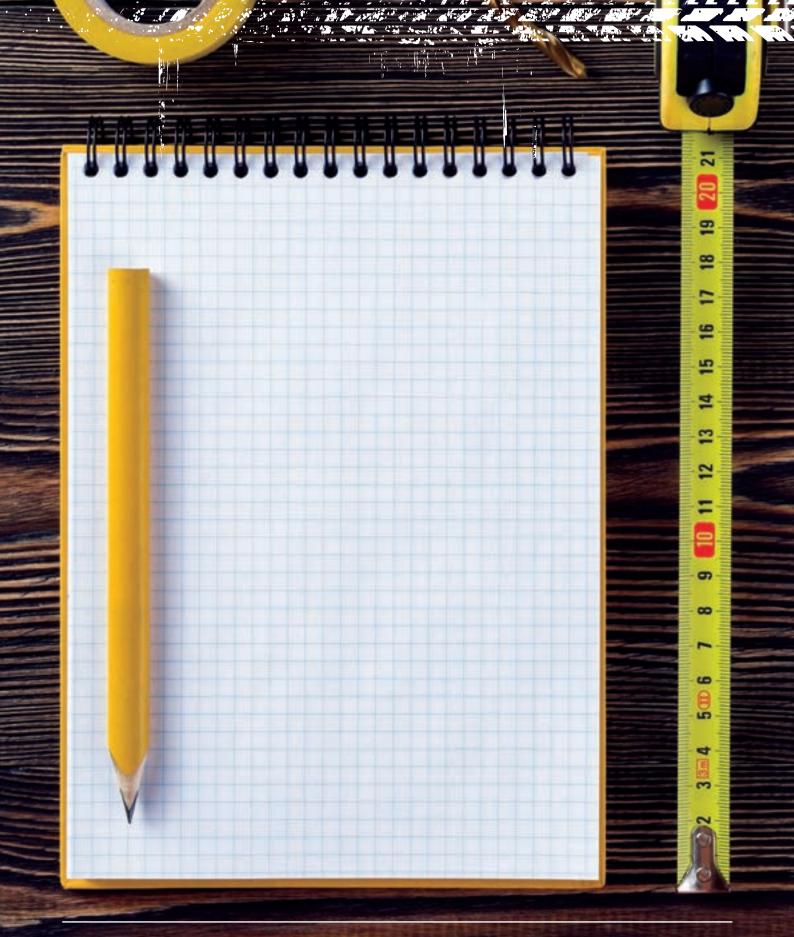



SAI GLOBAL





activetrade.com.au



Scan QR to view project application videos and brochures