





LETO[®] bamboo

www.letobamboo.com

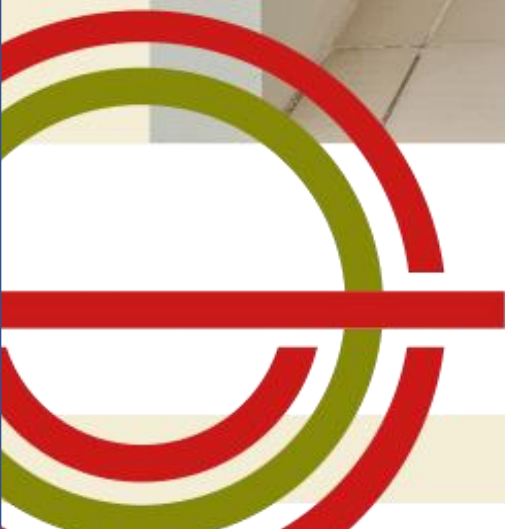


CREATIVE DOORS

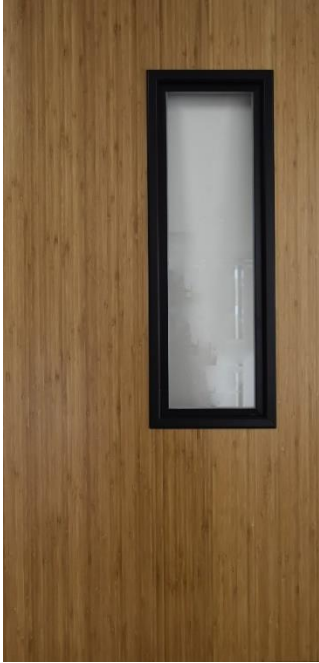





DOOR STYLES: Routed and Laser Etched

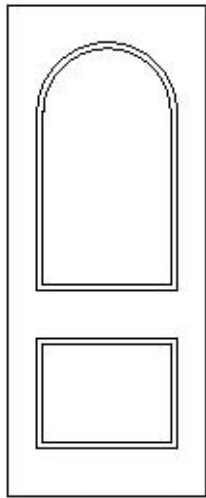


1. ARTEMIS

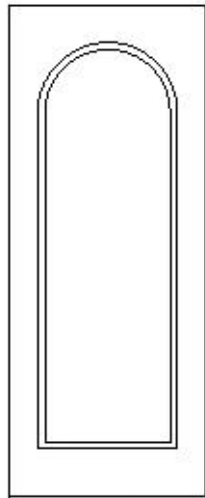


2. GELOS

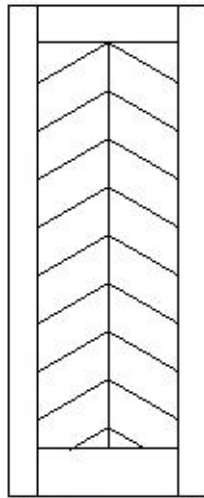


3. KRATOS

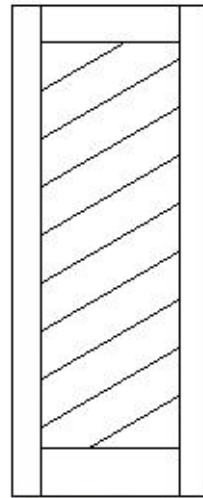


4. STYX

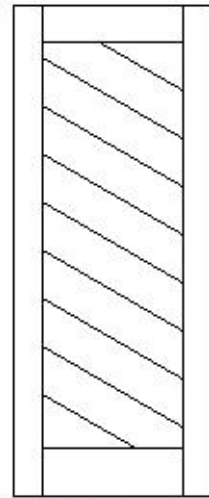


5. NYX

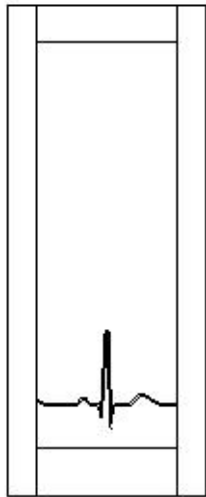


6. APOLLO

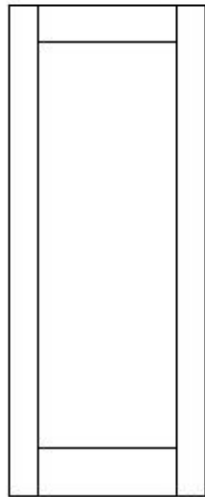


7. HELIOS

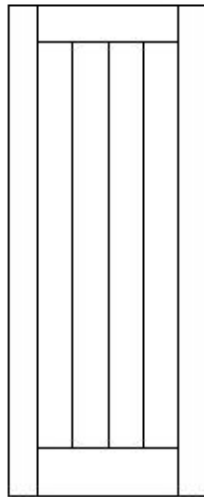


8. PERSEES

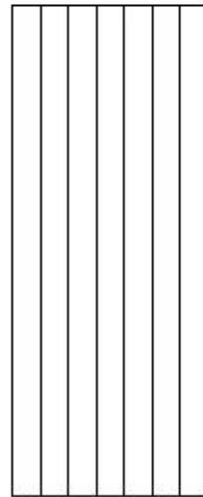


9. CRIUS

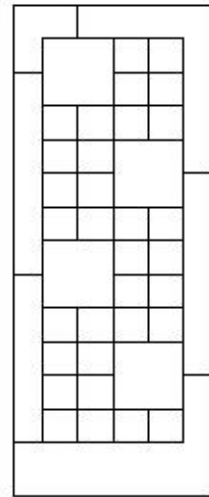


10. EROS

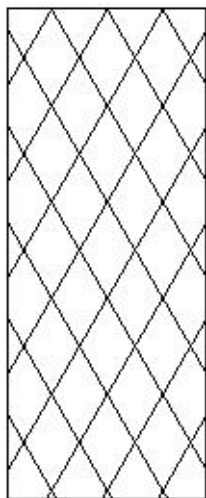


11. SETORIA

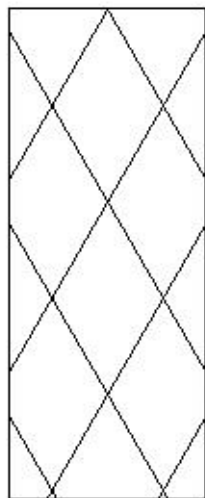


12. SELENE

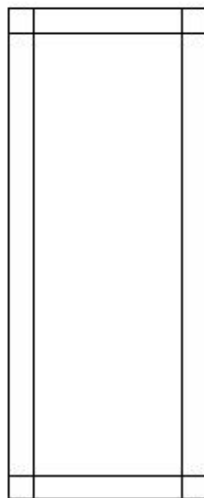

13. ALECTO

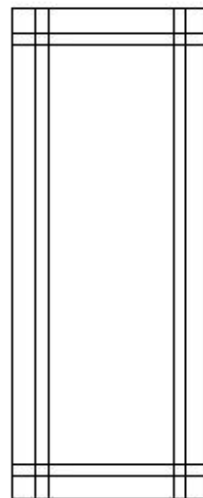


14. ANGELIA

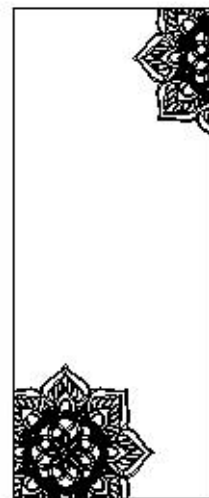


15. ANTHEIA


DOOR STYLES: Glazed

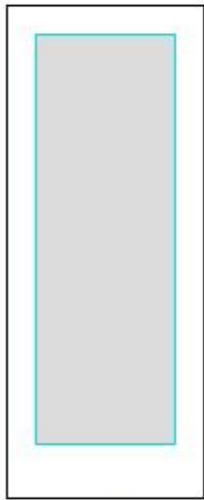


26. GERYON

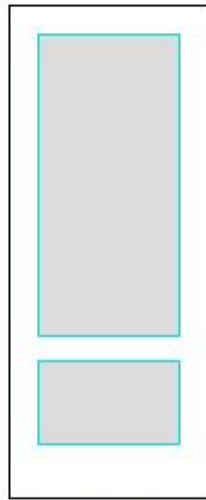


27. TALON

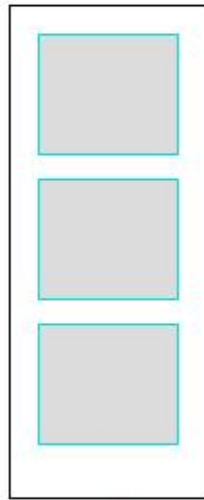


28. ORION-3

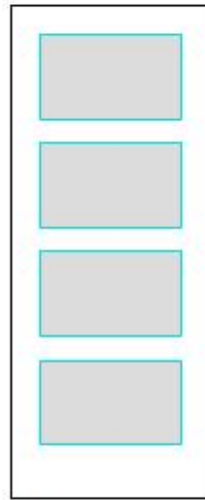


ORION-4

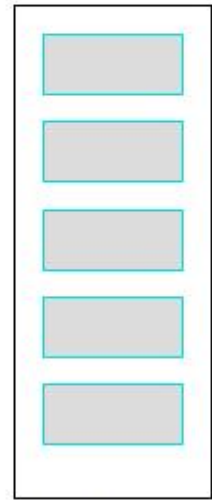


ORION-5

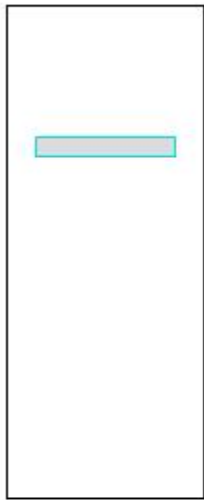


29. ATLAS-1

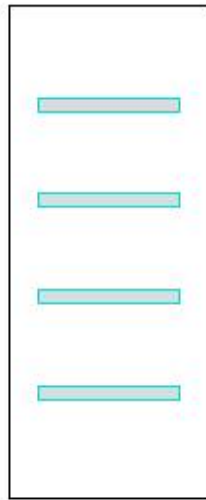

ATLAS-4

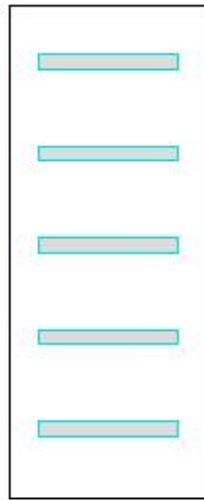


ATLAS-5

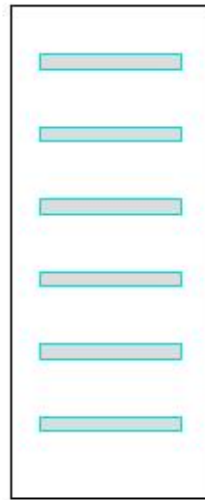


ATLAS-6

DOOR STYLES: Glazed and Routed

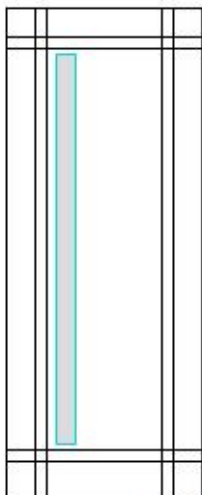

30. BOREAS

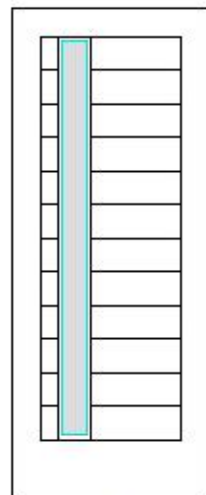

31. TYCHE

DOOR SIZES

Height x Width

Height	Width	Thickness
410	x 2040 (side light)	x 30 or 40mm
720	x 2040	x 30 or 40mm
820	x 2040	x 30 or 40
900	x 2040	x 30 or 40
920	x 2040	x 30 or 40
1020	x 2040	x 30 or 40

Height	Width	Thickness
410	x 2100 (side light)	x 30 or 40mm
720	x 2100	x 30 or 40
820	x 2100	x 30 or 40
900	x 2100	x 30 or 40
920	x 2100	x 30 or 40
1020	x 2100	x 30 or 40

Height	Width	Thickness
410	x 2400 (side light)	x 30 or 40mm
720	x 2400	x 30 or 40
820	x 2400	x 30 or 40
900	x 2400	x 30 or 40
920	x 2400	x 30 or 40
1020	x 2400	x 30 or 40
1200	x 2400	x 30 or 40

No additional charges for non-standard sizes

OVER-SIZED

Height	Width	Thickness
410	x 2700 (side light)	x 40mm
720	x 2700	x 40
820	x 2700	x 40
900	x 2700	x 40
920	x 2700	x 40
1020	x 2700	x 40
1200	x 2700	x 40

Height	Width	Thickness
410	x 3000 (side light)	x 40mm
720	x 3000	x 40
820	x 3000	x 40
900	x 3000	x 40
920	x 3000	x 40
1020	x 3000	x 40
1200	x 3000	x 40



30mm thick
Narrow Grain in Carbonised colour



40mm thick
Narrow Grain in Carbonised colour



LETObamboo is an Australian owned company based in Victoria, with a network of distributors and re-sellers around Australia.

All the bamboo doors we supply are made to size and ready for clear finishing or painting. Do not use any sealer containing petroleum – we suggest non-toxic, water-based sealants such as Intergrain Ultraclear Exterior to all faces.

Our bamboo is certified by the **Forest Stewardship Council** and complies with the stringent tests applied by the **Living Building Challenge**. Our material is completely non-toxic, and carbon rich. As such, it is extraordinarily strong. Bamboo absorbs much more carbon than a stand of trees of the equivalent area, along with numerous other benefits to humankind and the Earth.



CERTIFICATE

This single certificate is to certify that

(The manufacturer is the supplier for the exclusive distribution of 100% Bamboo ply by LETObamboo Pty.Ltd in Australia)

Certificate registration code			
GFA-COC-003946			
Date of issue	19.04.2019	Date of expiry*	18.04.2024
Issue number	1	Version	1

has been assessed by GFA Certification GmbH according to the following standard:

- FSC-STD-40-004 (Version 3.0)

The company is therefore entitled to use the FSC trademark for the below mentioned products and/or services**.

Production and trade of bamboo products



FSC
www.fsc.org
FSC® A000511






Jörn Ackermann, Managing Director

GFA Certification GmbH • Alter Teichweg 15 • 22081 Hamburg • Germany
Telefon: +49 40 5247431 0 • Fax: 449 40 5247431 999 • www.gfa-cert.com



**The validity of this certificate shall be verified on the FSC database at www.fsc.org.™ A disclaimer of the products and services as well as a list of areas and/or organizational members that are included in the scope of the certificate may be obtained from the FSC Database. The ownership of the products and services listed is guaranteed by the members of the FSC and is not necessary for each of them. This certificate (including all copies or reproductions) remains the property of GFA and shall be returned or destroyed upon request. This certificate and any related evidence have a particular product supplied by the certificate holder as FSC-certified or FSC Controlled Wood. Products offered, shipped or sold by the certificate holder can only be considered covered by the scope of this certificate when the required FSC chain of custody is in place on receipt and shipping documents.

Hardness

Bamboo is harder than traditional hardwood timbers. The Janka hardness rating chart below provides a comparison between bamboo and a range of timber alternatives.

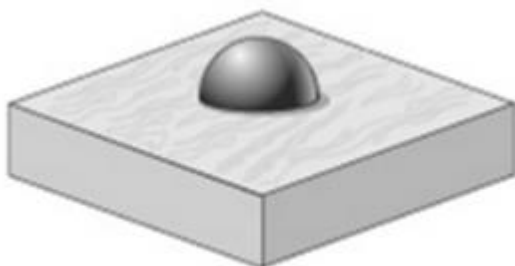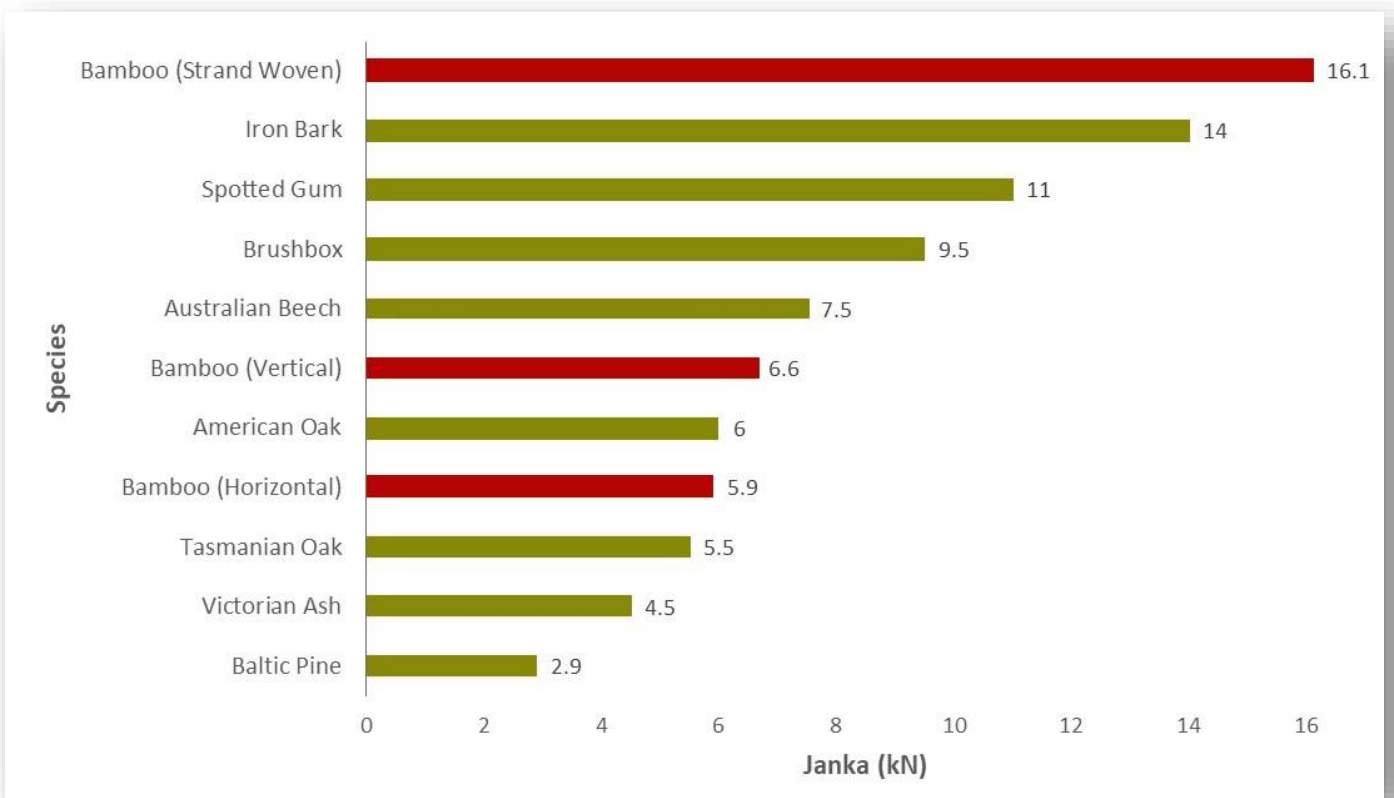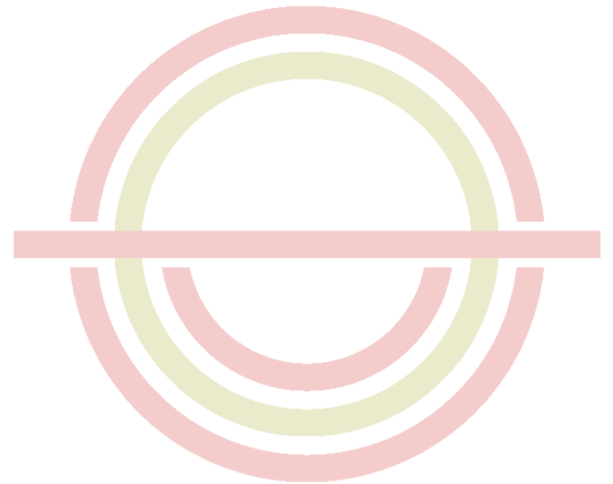

The Janka hardness test measures the resistance of a sample of wood to denting and wear. It measures the force required to embed an 11.28mm diameter steel ball halfway into a sample of wood.

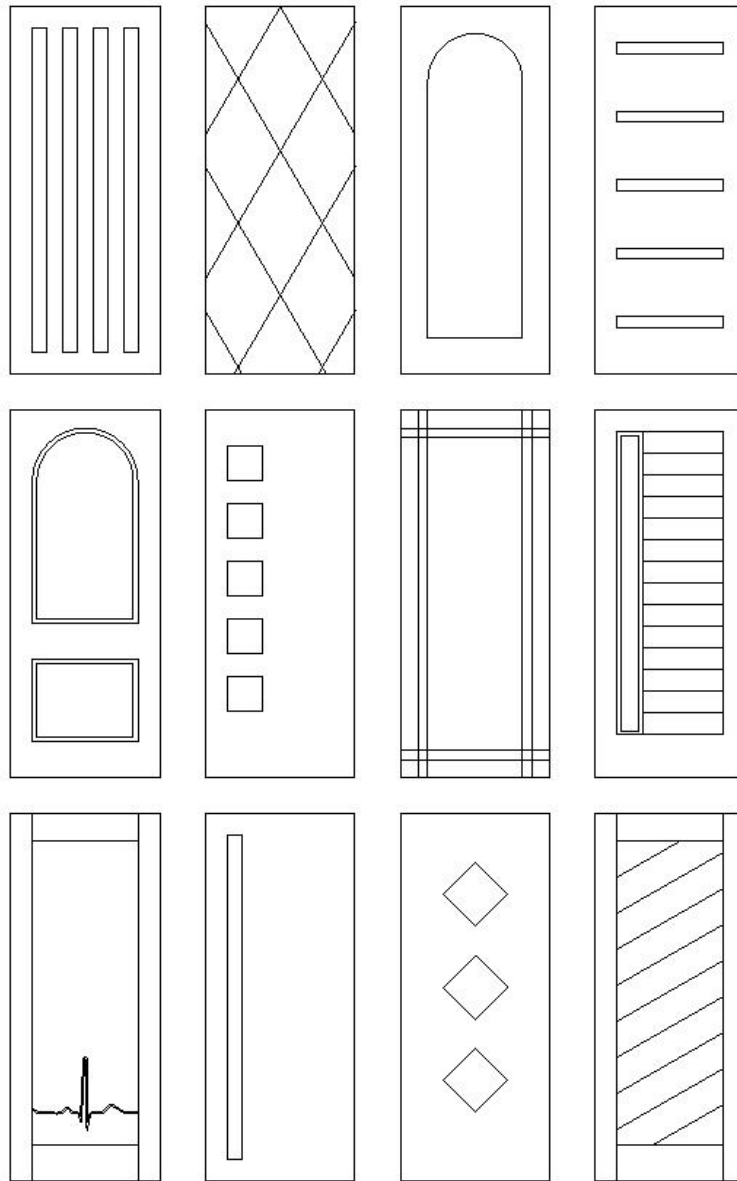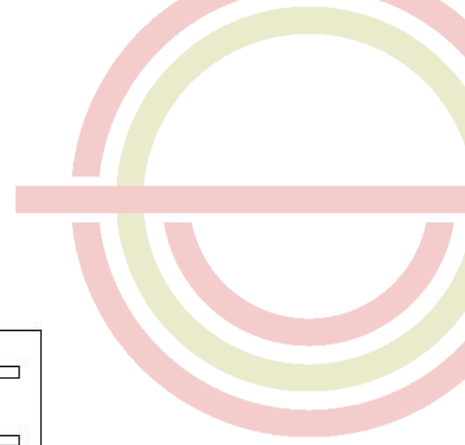

LETO[®] bamboo

Now it's up to you!

t. +61 3 8512 0681

e. letosales@letobamboo.com

a. 14 Endeavour Way, Braeside, Victoria, Australia, 3195.

t. +61 411 724 890

w. letobamboo.com