


PROMATECT®-XS

Second Generation Fire Protective Board

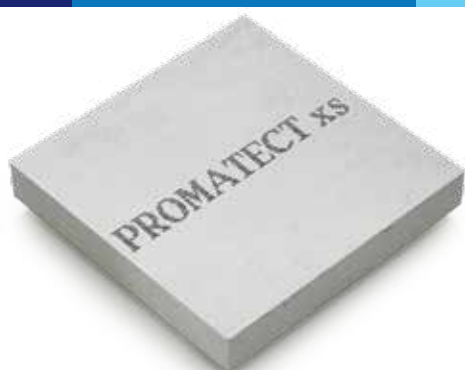

Description

PROMATECT®-XS is an innovative high performing non-combustible fire protective board, based on PromaX® technology, specifically designed for the fire protection of structural steelwork. The second generation of the product combines efficient fire protection with unique ease of installation, high quality surface finishing and enhanced mould and moisture resistance.

Application

Fire protection of structural steel beams and columns, open and hollow sections, up to 120/-/-.

Benefits

- Thin board thicknesses for fire protection of any steel structure.
- Non-combustible.
- Frameless installation for time and space optimization.
- Easy installation with staple fixings, no need for glue or filler.
- Easy cutting, even with a knife (score & snap).
- Can be installed before the building is weathertight (up to 6 months semi-exposed).
- Temporary resistant to high humidity, weather and mould.

Composition

PROMATECT®-XS is made of aerated calcium sulphate di-hydrate, reinforcing glass fibres, functional additives and water. The core is reinforced by glass-mat facers on the front and back of the boards. The board contains a water repellent additive and a biocide to inhibit mould growth.

Appearance

PROMATECT®-XS exhibits smooth surface finishes on front and back. The core and the front and back surfaces of the board are off-white coloured. Production information of the board is printed on its back side. The board exhibits square edges on its longitudinal and transversal sides.

Certification

The board is CE marked according to **ETA 18/0645** based on EAD 350142-00-1106 (Fire Protective Board, Slab and Mat Products And Kits) for the following use categories: Z2 - internal use, Y - external use semi-exposed.

Storage and handling

- Store the boards on a flat surface, under cover, in a dry and ventilated space. Also after cutting to size it is recommended to store the panels on a flat surface
The boards shall always be manipulated from the stack by two persons and then be transported vertically
- Don't expose the boards to temperatures below 0°C when wet.

Installation and finishing

PROMATECT®-XS can be easily cut with a knife. For sawing of large quantities an electric saw with dust extraction is recommended. Also when cutting with a knife, a tight corner connection can be achieved, by lightly rasping the edge after cutting.

PROMATECT®-XS fire protective boards can be easily installed with staples and do not require the use of glue or a joint filler.

For aesthetic purposes, joints can be finished with standard plasterboard compounds and beads.

Safety instructions

- Please refer to the PROMATECT®-XS safety information sheet.

Data (see overleaf)

Dimensions and tolerances

Thickness (mm)	Length (mm)	Width (mm)	Boards/pallet	Nominal weight (kg/m ²)
15	2500	1200	32	13.7
20	2500	1200	24	18.3
25	2000	1200	24	22.9

Board tolerances: Thickness: ± 0.5 mm | Length and width: -5 /+0 mm | Squareness: 2.5 mm/m

Technical data and properties

Nominal density (50% RH, 23°C)	915 (±8%) Kg/m ³
Flexural strength* (EN 12467)	
Longitudinal	10 MPa (12.5mm) 5 MPa (25mm)
Transversal	7 MPa (12.5mm) 4 MPa (25mm)
Flexural strength* (EN 789)	
Longitudinal	7 MPa (12.5mm) 7 MPa (25mm)
Transversal	7 MPa (12.5mm) 6 MPa (25mm)
Flexural strength* (EN 12467)	
Longitudinal	3000 MPa
Transversal	2600 MPa
Durability (EAD 350142-00-1106)	25 years of working life in internal (Z2) and semi-exposed (Y) use
Fire reaction classification (EN 13501-1)	A1 Non-Combustible
Thermal conductivity λ (20° C)	0.275 W/mK

* These values are guidance values, and do not reflect a statistical evaluation nor a minimum guaranteed value

The product must be applied in accordance with regulations for construction material in general and passive fire protection in particular, with the applicable national test certificates and approvals and in accordance with applicable national building regulations. Products may only be applied by trained professionals with adequate knowledge and only after thorough review of the installation guidelines, safety data sheets, national test certificates and approvals. For additional information on how and where to use this product please refer to the Promat handbook or contact your local Promat office. All the relevant documents can be obtained free of charge from the local Promat office. For Non-European Union countries separate guidelines are relevant. If required please contact your local Promat office.

Promat Australia Pty Ltd

South Australia office

1 Scotland Road
SA 5031 Mile End South
☎ 1800 Promat (776 628)
☎ +61 8 8352 1014

New South Wales office

Unit 1, 175 Briens Road
Northmead, NSW 2152
☎ 1800 Promat (776 628)
☎ +61 2 9630 0258

Victoria office

Unit 1, 355 Grieve Parade
Altona North, VIC 3025
☎ 1800 Promat (776 628)
☎ 1800 334 598

Queensland office

80 Stradbroke St
Heathwood QLD 4110
☎ 1800 011 376
☎ 1800 334 598

✉ PAPL.mail@etexgroup.com

www.promat.com