

Panelink & Renderpanel


Insulated Wall Panels

Versiclad insulated sandwich wall panels can be used in a wide range of applications. Available in a variety of colours and thicknesses to suit your thermal and aesthetic requirements.

Panelink and FC Panel sandwich panels offer quick and simple installation, utilising an extruded aluminium perimeter framing system.

The standard range of panel systems are complimented by the ability to supply custom made wall panels using a variety of different products to suit the most innovative requirements.

Perfect for your sunroom, caravan annexe, garden shed, patio enclosure or site office.

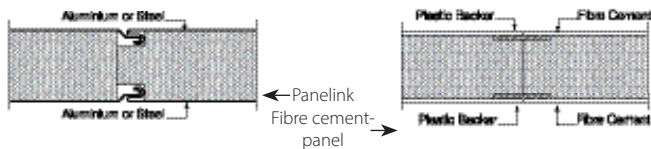

Panelink 1200mm Width Range - Steel and Aluminium

1200mm Width Panel Colour Range			1200mm Width Panel Finish Range			
Pearl White	Cream	Merino	Smooth	Embossed	Micraline	Luxline 100mm Centres (Available on Smooth & Embossed) NEW

Panelink 1140mm Width Range - Steel both sides

1140mm Width Panel Colour Range						1140mm Panel Finish Range	
NEW Pearl White	Off White (*Surfmist)	Smooth Cream (*Classic Cream)	Merino (*Paperbark)	Dusk (*Evening Haze)	Gull Grey (*Shale Grey)	Smooth Finish	Micraline
Birch Grey (*Dune)	Armour Grey (*Windspray)	Wallaroo (*Wallaby)	Gulf (*Gully)	Basal (*Basalt)	Jasmin Brown (*Jasper)	NEW Finish 126mm Centres (Available Smooth only) Luxline126	
Slate Grey (*Woodland Grey)	Mist Green (*Pale Eucalypt)	Heritage Red (*Manor Red)	Zincalume®	Caulfield Green (*Cottage Green) • Limited Warranty	Mountain Blue (*Deep Ocean) • Limited Warranty		
Iron Grey (*Ironstone) • Limited Warranty	Monolith (*Monument) • Limited Warranty	Ebony (*Night Sky) • Limited Warranty	^MagnaFlow™ Corrosion Resistant Colours →	Off White^ (*Surfmist) Magnaflow	Armour Grey^ (*Windspray) Magnaflow		

NB: Ceiling finishes apply to all colours in the 1140 width range.
 Colour swatches are provided as an indication of colour only and may not be an actual representation of colour. We recommend checking colour against an actual sample before purchasing.
 * Equivalent colour names are trademarks of Blue-Scope Steel Limited and used only for comparison.
 • Limited Warranty applies to these dark colours
 ^ Additional fees apply for MagnaFlow™ colours. MagnaFlow™ must be both sides.

OPTIONAL LININGS		EXTERIOR		
Standard Thicknesses Available: 38, 50, 75mm		Aluminium **	Steel **	FC 4.5mm SE
INTERIOR	Aluminium **	2400, 2700, 3000, 3300, 3600 [†] (1200mm wide)	2400, 2700, 3000, 3300, 3600 [†] (1200mm wide)	2400, 2700, 3000 (1200mm wide)
	Steel **	2400, 2700, 3000, 3300, 3600 [†] (1200mm wide)	2400, 2700, 3000, 3300, 3600 [†] (1140 or 1200mm wide)	2400, 2700, 3000 (1200mm wide)
	FC 4.5mm SE	3000 (1200mm wide)	N/A	2400, 2700, 3000 (900/1200mm wide)

Metal Panels: † Custom lengths available between 1200 - 8000 with a min. of 4 panels required, per non-standard length or set up fee applies. ** Self-mating joint system.