


# R-flor

## Radiant Barrier Structural Flooring

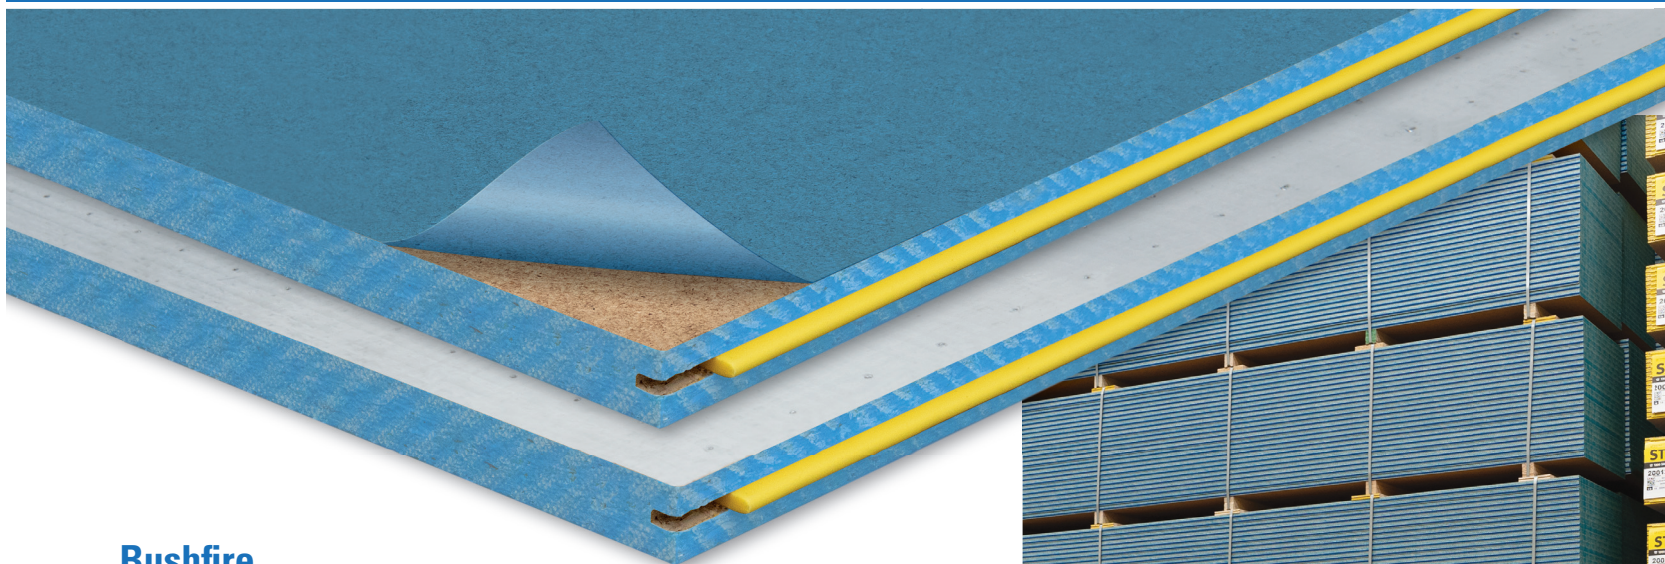

### Bushfire Attack Level (BAL)

- R-flor has an increased Bushfire Attack Level rating (BAL) compared to normal particle board flooring
- If subfloor is enclosed then R-flor can be used for the highest BAL rating of BAL – FZ
- If subfloor is unenclosed then R-flor can be used up to a BAL 29

### Increased R Value (Insulation)



- R-flor has an increased insulation R value of approx. 40% compared to normal STRUCTAflor YELLOWtongue flooring using a common flooring system

### Termite Resistant H2

- R-flor H2 is deemed to be a termite resistant building material under the Building Code of Australia and AS 3660.1

### Load Carrying Capability

- R-flor comes in three thicknesses enabling user to select R-flor based upon what load factor is required
- 19mm YELLOWtongue, 3600mm x 800mm
- 22mm REDtongue, 3600mm x 800mm
- 25mm BLUEtongue, 3600mm x 800mm

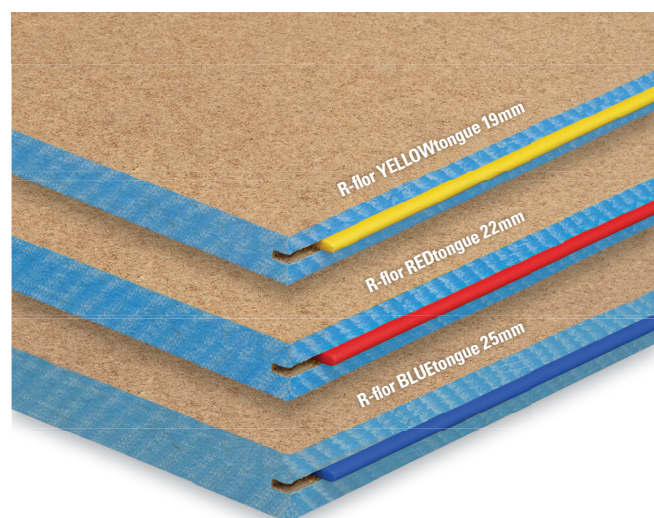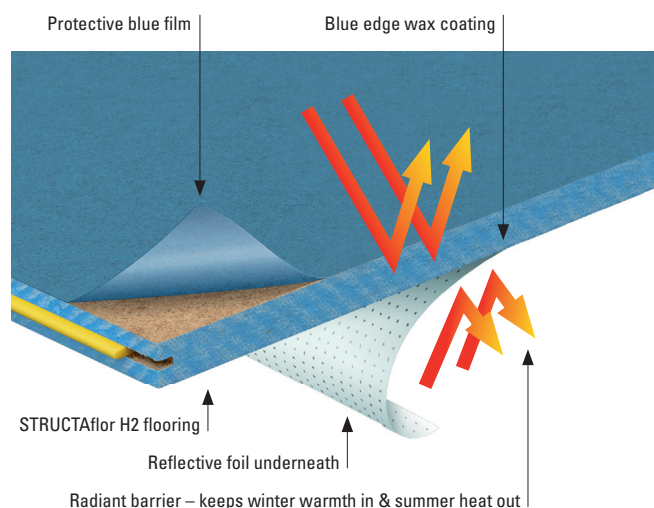

**Australian  
PANEL PRODUCTS**

[www.australianpanelproducts.com.au](http://www.australianpanelproducts.com.au)

Our product is manufactured from managed & renewable plantation pine.

