STEEL FRAME BRAD



Product Description


Steel frame brad designed to fix trim to light gauge steel frames.

Product Advantages

- Simplifies installation of mouldings in steel frame houses with no fiddly gluing or screwing.
- Holds stronger than a 16 Gauge C brad into timber, requiring 100NM more force to withdraw the brad from steel frame.
- Round shank, conical point and specially formulated resin for extra hold in steel.
- Paslode steel frame brad is a powerful tool and fastener system, reducing your time on the job.

| Product Code | Description | Length | Diameter | Head | Tip | Shank | Finish | Fuel Cell | Quantity |
|--------------|-----------------------------------|--------|----------|------|---------|-------|-------------|-----------|----------|
| B20638 | 38MM STEEL FRAME HARDENED BRAD | 38MM | 1.7mm | ND | Conical | 5MM | Zinc Plated | 2 | 2000 |
| B21645 | 45MM STEEL FRAME HARDENED BRAD | 45MM | 1.7mm | ND | Conical | 1.5MM | Zinc Plated | 2 | 2000 |

Withdrawal Testing

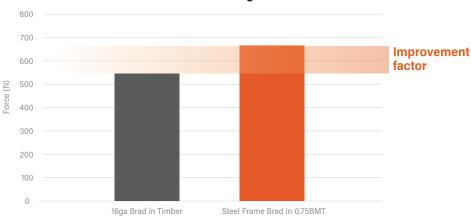



Steel frame brads are engineered to be used with a Paslode straight bradder and the 16ga nose plate.



PASLODE AUSTRALIA Customer Service (02) 9829 4000