


## TRANSPORT SAFETY GUIDELINE – CUSTOMER PICKUPS

### OVERHANG REQUIREMENTS

The overhang limits on this page are based on maximum limits for product protection and/or the strictest state or territory regulations. Wide loads should not be inclined (due to wind loadings).


**The drivers vision must not be obstructed.** Projections/overhangs that are dangerous are not acceptable, even if they are within the limits below.

For daytime travel, a minimum 300mm square bright red flag is required on any overhang that cannot be easily seen. This is mandatory for overhangs beyond 1200mm past the end of a vehicle (i.e. for trucks).

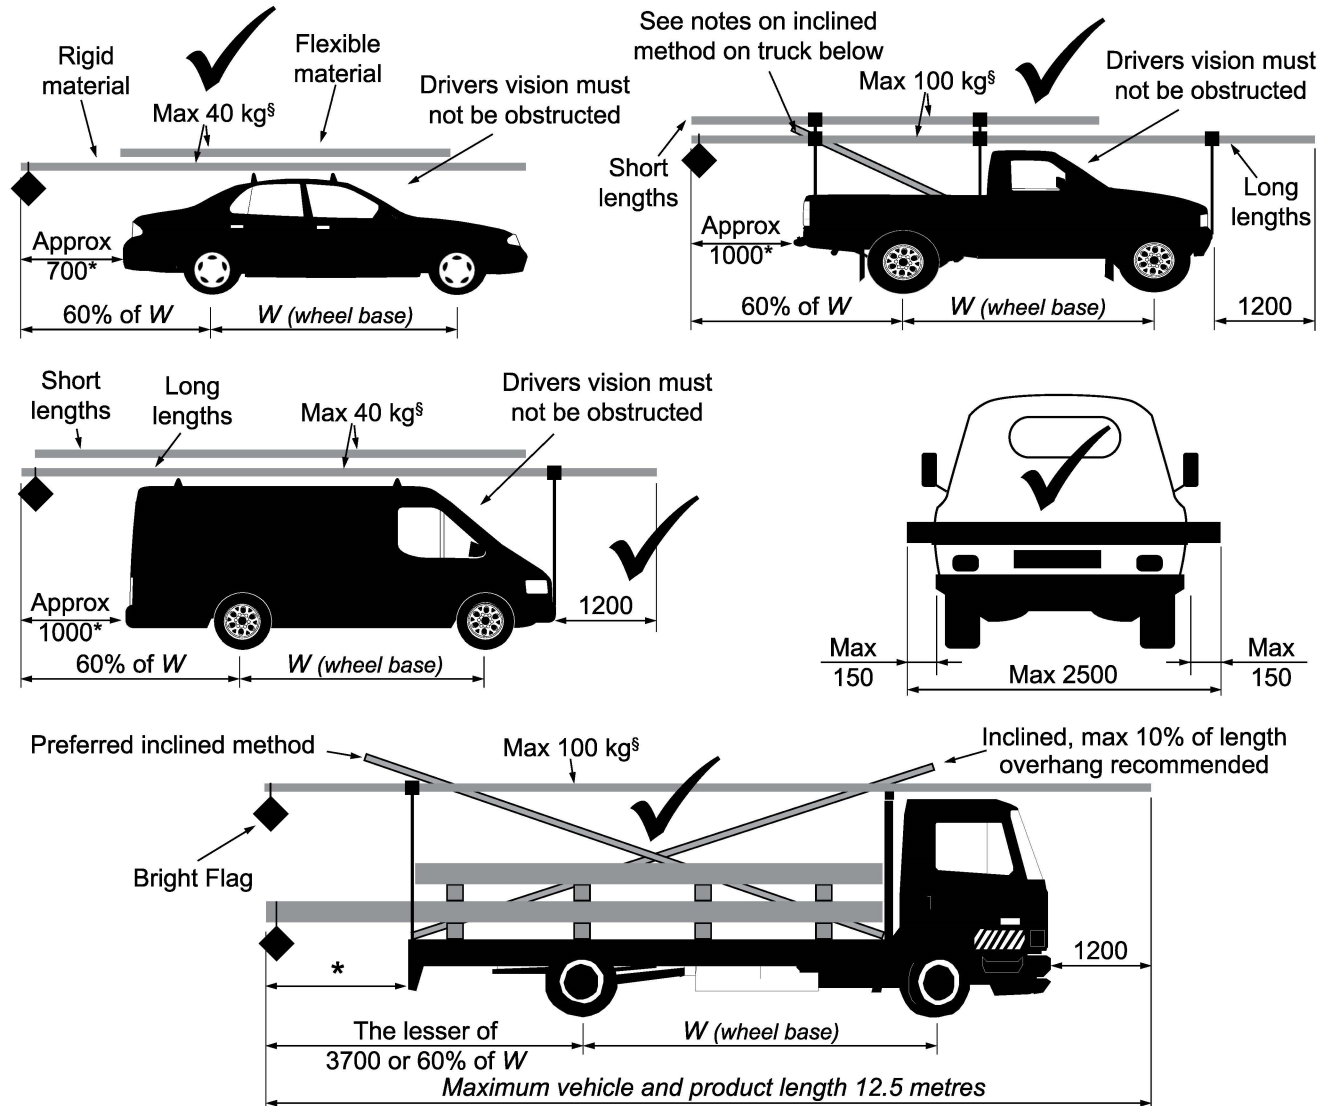

\* Maximum 1200 mm for vehicles less than 4.5 tonne GVM (provided the rear overhang is less than 3700 mm or 60% W).

§ Maximum weight on racks without written verification of rated capacity. Refer to section 4 for more details.

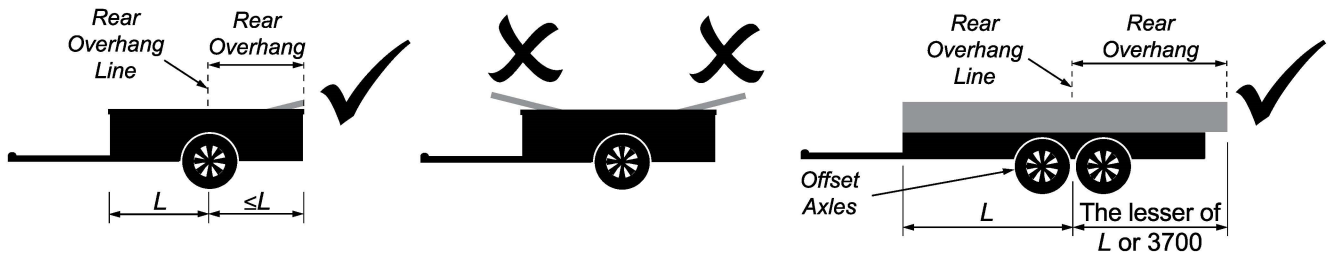

The rear overhang of a trailer must be the lesser of the front load carrying area or body ahead of the centre of the axle group (L) and 3.7 m.

No forward or rearward overhangs for standard box trailers. (Exceptions in QLD, WA & SA due to their definition of L)


## TRANSPORT SAFETY GUIDELINE – LIGHT VEHICLE LOADING

### 1. THIS GUIDELINE:

Provides the state requirements on vehicle dimension limits in New South Wales and Australian Capital Territory. Use these vehicle loading limits in conjunction with the Customer Pick Up Guideline (TSG18).

### 2. ROOF RACK CAPACITIES

Utes with 2-3 racks - Guide: 100 kg max.

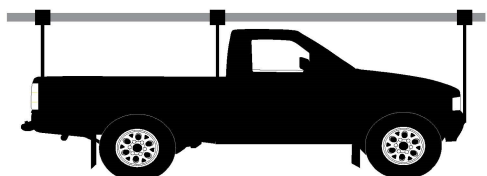

Sedans, vans and wagons - Guide: 50 kg max.



Vehicles are not to be overloaded. Unless the driver has obtained written verification of the rack and vehicle, where a load exceeds 50 kg (for sedans, vans and wagons) or 100 kg (for utes with trade racks), the driver must take into account factors particular to the individual vehicle to determine whether or not the product may be loaded. BlueScope will not accept liability for loss or claims arising from drivers accepting loads of more than 50 kg (for sedans, vans and wagons) or 100 kg (for utes with trade racks).

### 3. OVERHANG REQUIREMENTS







The driver's vision must not be obstructed. Projections/overhangs that are dangerous are not acceptable, even if they are within the limits below.



For daytime travel, a minimum 300mm square bright coloured flag is required on any overhang that cannot be easily seen. This is mandatory for rear overhangs beyond 1200mm past the end of a vehicle or trailer (see note \*).

#### Rigid product loading:

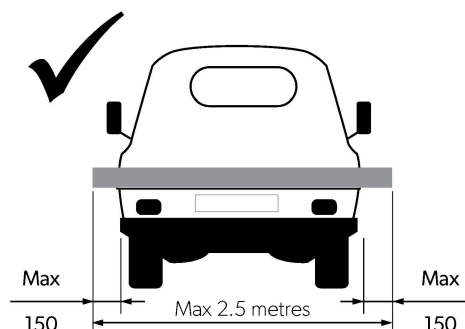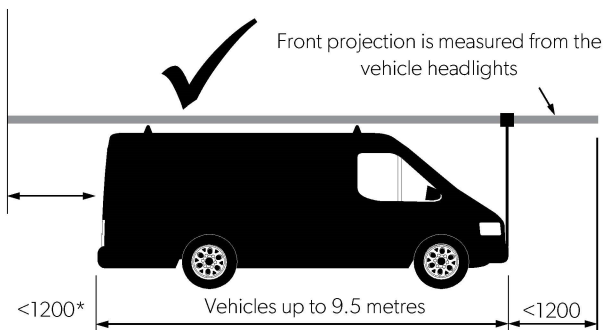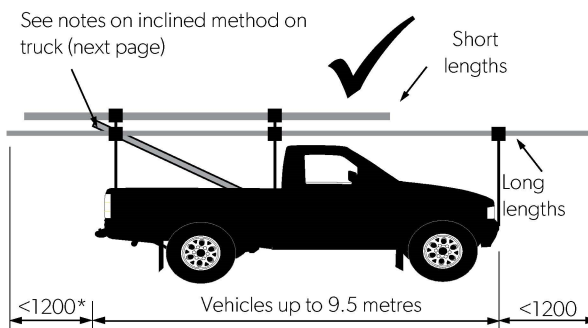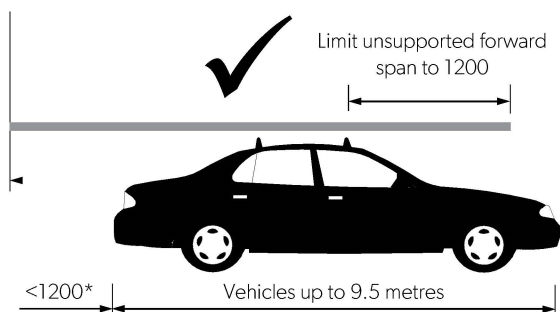

\*Rear projection may exceed 1200mm where the total length of the loaded vehicle does not exceed 12.5 metres and the rigidity of the product permits.