

RM4058 & RM4072

RAIN MAINS SYSTEMS

The Waterpro® RM system is designed for speed of installation - no cables, no float, no solenoid, no electronic controls. The simplicity of this system has the added benefit of making it very affordable. The RM system stops flow of mains supply while rain water is being pumped to help conserve our precious resource. This system is suited for applications supplying laundry and toilets, and is also suitable for cabins or small houses with one bathroom. This system is not suitable for suction lift.

CODE	MODEL	RATED		MAXIMUM	
		FLOW (L/min)	HEAD (m)	FLOW (L/min)	HEAD (m)
17265	RM4058 Rains to Main Controller with DJ58 Pressure Pump	25	20	55	33
15421	RM4072 Rains to Main Controller with DJ72 Pressure Pump	40	25	71	40

APPLICATIONS

- Domestic toilet & laundry
- Small house / cabin / granny flat (1 bathroom)
- Small commercial / Industrial*
- Garden Irrigation*
- Toilet blocks (up to 6 fixtures)*
- Construction / mine site offices*


FEATURES & BENEFITS

- Rains to Mains switch over system allows mains water to flow if tank water is unavailable, and stops mains flow if tank water is sufficient
- Valveset is 100% hydraulic - no electronics
- Watermark certified, includes dual check valve on mains
- Reliable, efficient power-saving performance
- Automatic Pressure Controller giving consistent pressure supply, automatically checks for water every 24 hours after a run dry event
- Run-dry protection and thermal overload protection for the Pump

CONSTRUCTION

- Stainless-steel Casing and Shaft
- Carbon/Ceramic Mechanical Seal for reliability
- IP55 motor with F-class Insulation
- Quick plug Pressure Controller connection
- Noryl Jet and Venturi, Diffuser & Impeller
- Valveset is brass construction
- AS4020 Certification for Potable Water

*Check specifications required

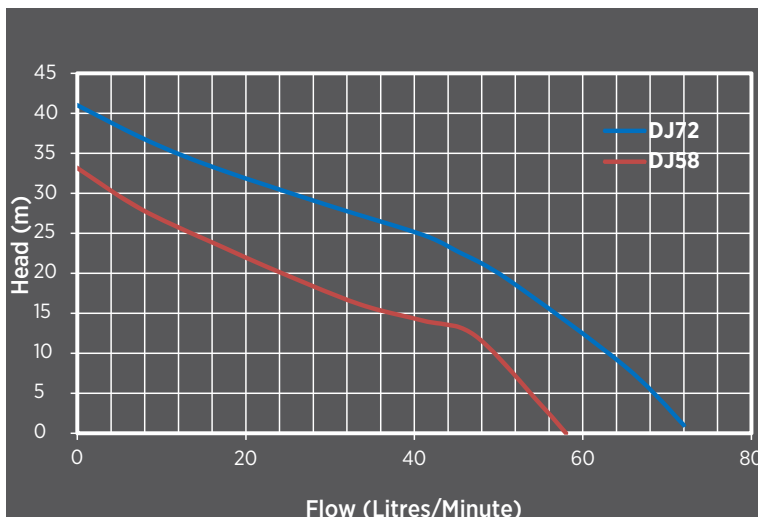

RM5096

RAIN MAINS SYSTEMS

The Waterpro® RM5096 system is designed for speed of installation - no cables, no float, no solenoid, no electronic controls. The simplicity of this system has the added benefit of making it very affordable. The RM5096 system stops flow of mains supply while rain water is being pumped to help conserve our precious resource. This system is suited for applications supplying laundry and toilets, and is also suitable for cabins or small houses with one bathroom.

CODE	MODEL	RATED		MAXIMUM	
		FLOW (L/min)	HEAD (m)	FLOW (L/min)	HEAD (m)
26502	RM5096 Rains to Main Controller with RSMP35 Pressure Pump	30	28	105	35

APPLICATIONS

- Domestic toilet & laundry
- Small house / cabin / granny flat (1 bathroom)
- Small commercial / Industrial*
- Garden Irrigation*
- Toilet blocks (up to 6 fixtures)*
- Construction / mine site offices*

FEATURES & BENEFITS

- Rains to Mains switch over system allows mains water to flow if tank water is unavailable, and stops mains flow if tank water is sufficient
- Valveset is 100% hydraulic - no electronics
- Watermark certified, includes dual check valve on mains
- Reliable, efficient power-saving performance
- Automatic Pressure Controller giving consistent pressure supply, automatically checks for water every 24 hours after a run dry event
- Run-dry protection and thermal overload protection for the Pump

CONSTRUCTION

- Stainless-steel Casing and Shaft
- Carbon/Ceramic Mechanical Seal for reliability
- IP65 motor with F-class Insulation
- Quick plug Pressure Controller connection
- Valveset is brass construction
- AS4020 Certification for Potable Water



*Check specifications required

