



AiroMatic[®]

SMART ROOF VENTILATOR

AiroMatic is a high-performance smart ventilation system built-in with Air iQ, designed to automatically detect & remove heat and moisture from the roof space.

- ✓ **HEAT REDUCTION**
Automatically detects and removes heat from your roof space[^]
- ✓ **CONDENSATION MANAGEMENT**
Reduce the risk of condensation-related damage to your home.
- ✓ **POWERFUL PERFORMANCE**
Maximum flow rate equivalent of up to six wind driven vents

Product Specifications


Materials:	UV stable clear acrylic dome & aluminium flashing
Throat Diameter:	250mm
Product Weight:	2.95kg
Applications:	Suitable for metal or tile roofs
Motor:	24VDC
Flow rate:	Min: 290m ³ /hr Max: 647m ³ /hr



Detailed warranties, technical data sheets and installation instructions available on website For more information, call 1300 858 674

+One year warranty on power pack.

[^]Operating mode preset to fixed speed for NCC2019 compliance. For more information on how to activate alternate setting see the Product Manual.

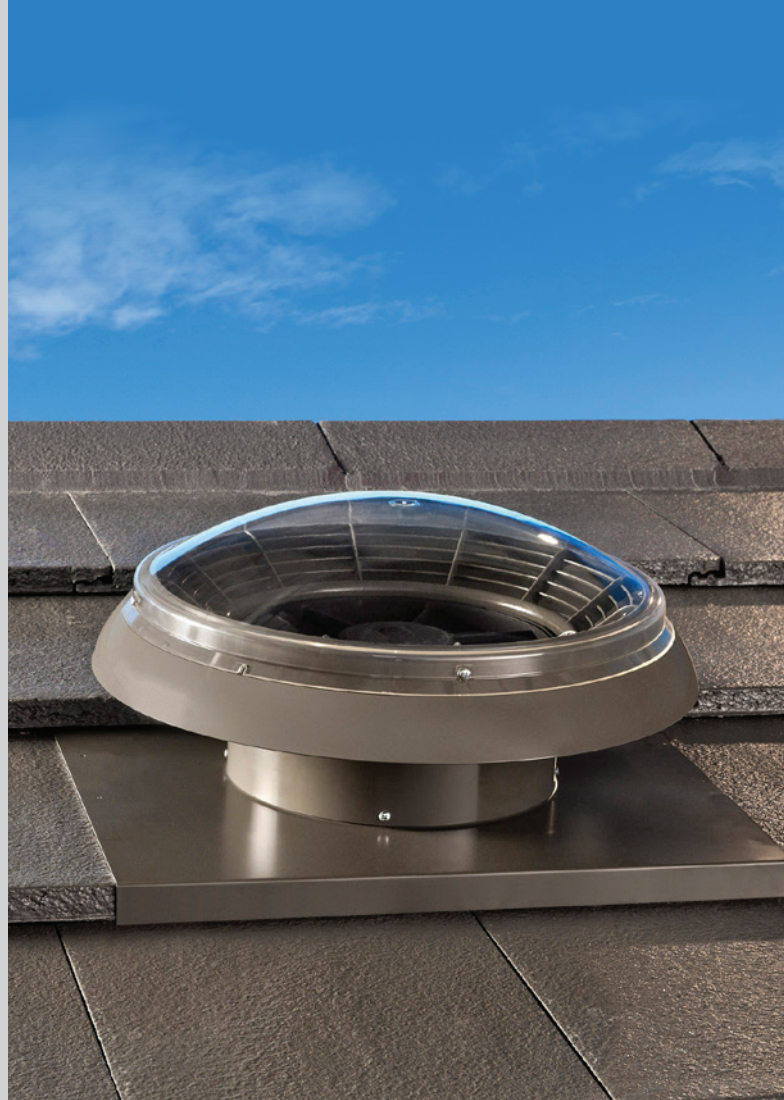

Enhance your ventilation roof system by adding four eave vents per AiroMatic

AiroMatic colour range:



The COLORBOND steel colour swatches shown in this flyer have been reproduced to represent actual product colours as accurately as possible. We recommend checking your selection against an actual sample. COLORBOND[®], BlueScope[™] and [®] Colour names are registered trademarks of BlueScope Steel Limited.



Why Ventilate?

Effective ventilation is an important way to create a more comfortable, healthier and energy efficient home. Removing the heat in summer and managing moisture in winter helps to create a better living environment for your family.



Heat Reduction

Removes heat and replaces with outside air



Energy Efficient

Helps reduce the load on air conditioning



Moisture Management

Reduce the risk of moisture - related damage to your home



Improve Air Quality


Replaces stale and polluted air with outside air

Two tips to effectively ventilate your home

1. There must be a path through which the air can be expelled, usually the ventilator.
2. There must be a path for replacement air to enter. Usually via eave, gable, subfloor or other static vents.

In summer, ventilation reduces heat in the roof space. While in winter, controls moisture and encourages fresh air.

Visit our website to find out more:
bradfordventilation.com.au

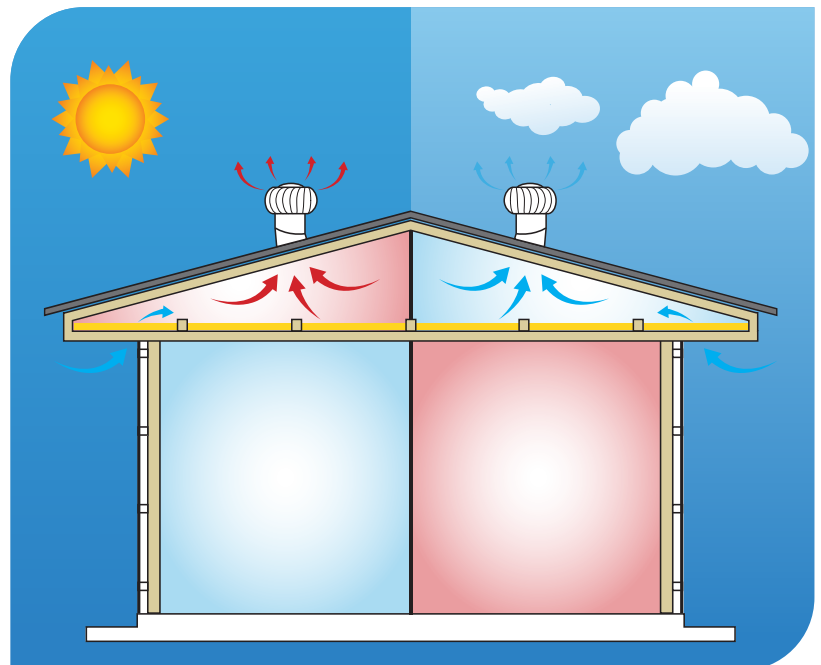

Bradford Ventilation is a business division of CSR Building Products Limited ABN 55 008 631 356.

The content of this flyer are copyright protected and may not be reproduced in any form without prior written consent of Bradford. Recommendations and advice regarding the use of the products described in this flyer are to be taken as a guide only and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.

